




BOLTE

GD

STUD WELDING GUNS FOR DRAWN ARC AND
SHORT CYCLE STUD WELDING



GD 16

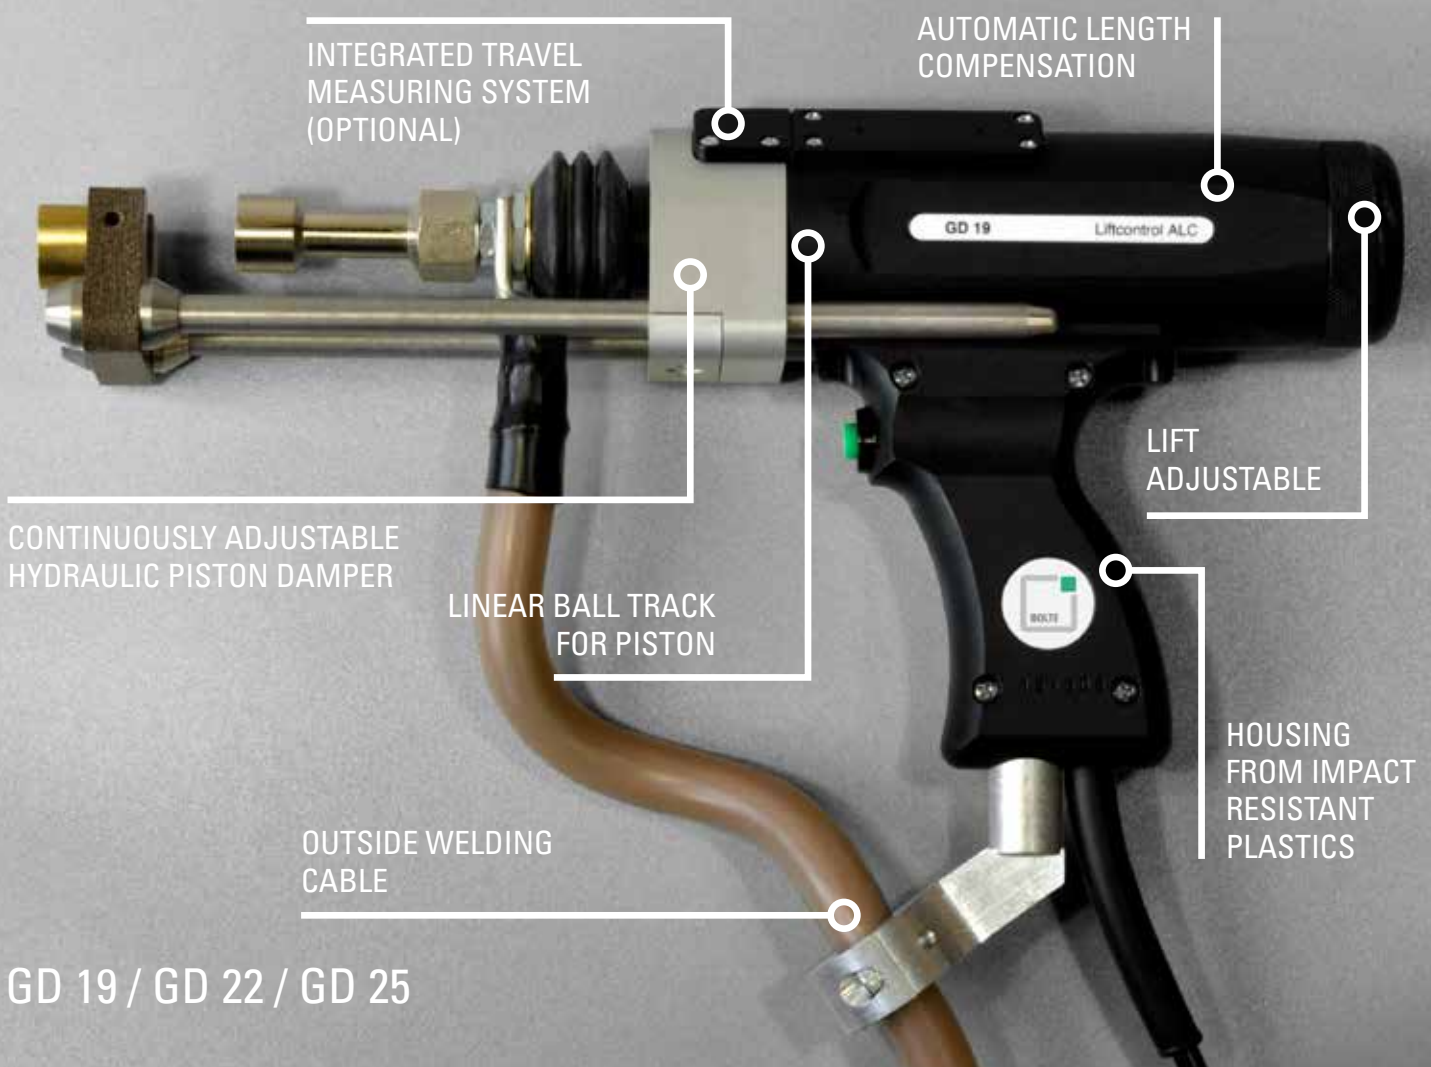

GD 19 / GD 22 / GD 25

INTEGRATED TRAVEL
MEASURING SYSTEM
(OPTIONAL)

AUTOMATIC LENGTH
COMPENSATION

LINEAR BALL TRACK
FOR PISTON

LIFT
ADJUSTABLE

HOUSING FROM
IMPACT RESISTANT
PLASTICS

GD 12sc

INTEGRATED TRAVEL
MEASURING SYSTEM
(OPTIONAL)

AUTOMATIC LENGTH
COMPENSATION

CONTINUOUSLY ADJUSTABLE
HYDRAULIC PISTON DAMPER
(ONLY GD 15)

LINEAR BALL TRACK
FOR PISTON

LIFT
ADJUSTABLE

HOUSING FROM
IMPACT RESISTANT
PLASTICS

GD 12 / GD 15

INTEGRATED TRAVEL MEASURING SYSTEM



- » MEASURING OF STUD PROTRUSION BEFORE THE WELD AS WELL AS STUD TRAVEL (LIFT, IMMERSION DEPTH, IMMERSION SPEED AND SHORT-CIRCUIT TIME) DURING THE WELD
- » MEASURED VALUES ARE SHOWN IN THE DISPLAY OF THE STUD WELDING UNIT*

*Only in connection with series PRO-I, PRO-D and PRO-S units.



- » ADVANTAGES:

MONITORING OF WELDING QUALITY

- » Comparison of actual values to set values for each weld
→ in case of variances a warning is displayed or the unit is locked for further welds
- » storage of the last ten welding parameter sets in the stud welding unit
optional: welding parameter memory for 24500 welding parameter sets



COMFORTABLE, EXACT AND FAST ADJUSTING OF STUD WELDING GUN

- » Correctly adjusted stud protrusion and lift are key factors for a high-quality stud weld.
→ As the adjusted values are shown in the display of the unit time-consuming manual measuring is no longer necessary.

TECHNICAL DATA AND CHARACTERISTICS

	GD 12sc	GD 12	GD 15	GD 16	GD 19	GD 22	GD 25
Welding range (Ø mm)							
Stud welding with ceramic ferrule		3 - 12	3 - 15	3 - 16	3 - 19	3 - 22	3 - 25
Stud welding with shielding gas		3 - 12	3 - 12	3 - 12	3 - 12	3 - 12	3 - 12
Short cycle stud welding with or without shielding gas	3 - 12						
Lift (mm) adjustable	0 - 2,5	0 - 2,5	0 - 2,5	0 - 4	0 - 4	0 - 6	0 - 6
Hydraulic piston damper (continuously adjustable)			x	x	x	x	x
Integrated travel measuring system	o	o	o	o	o	o	o
Piston guide							
Linear ball track	x	x	x	x	x	x	x
Automatic length compensation	x	x	x	x	x	x	x
Welding cable							
-cross-section (mm ²)	35	35	35	50	70	95	120
-length (m)	5	5	5	5	2	2	2
Welding cable							
inside	x	x	x	x			
outside					x	x	x
Control cable plug	12-pin	12-pin	12-pin	12-pin	12-pin	12-pin	12-pin
Housing from impact resistant plastics	x	x	x	x	x	x	x
Protection of piston guidance from welding spatters	x	x	x	x	x	x	x
Dimensions							
Width (mm)	57	57	57	68	68	68	68
Height (mm)	163	163	163	180	180	180	180
Length (mm)	195	180	180	260	260	295	295
Weight without cable (kg)	1,5	1,4	1,45	1,86	1,86	2,45	2,45

x – Standard, o – Option



Bolte GmbH

Flurstraße 25
D-58285 Gevelsberg

Tel.: +49 (0)2332 55106-0
Fax: +49 (0)2332 55106-11

Ohmstraße 3
D-85221 Dachau

Tel.: +49 (0)8131 5159-0
Fax: +49 (0)8131 5159-11

E-Mail: info@bolte.gmbh



www.bolte.gmbh